


Overview

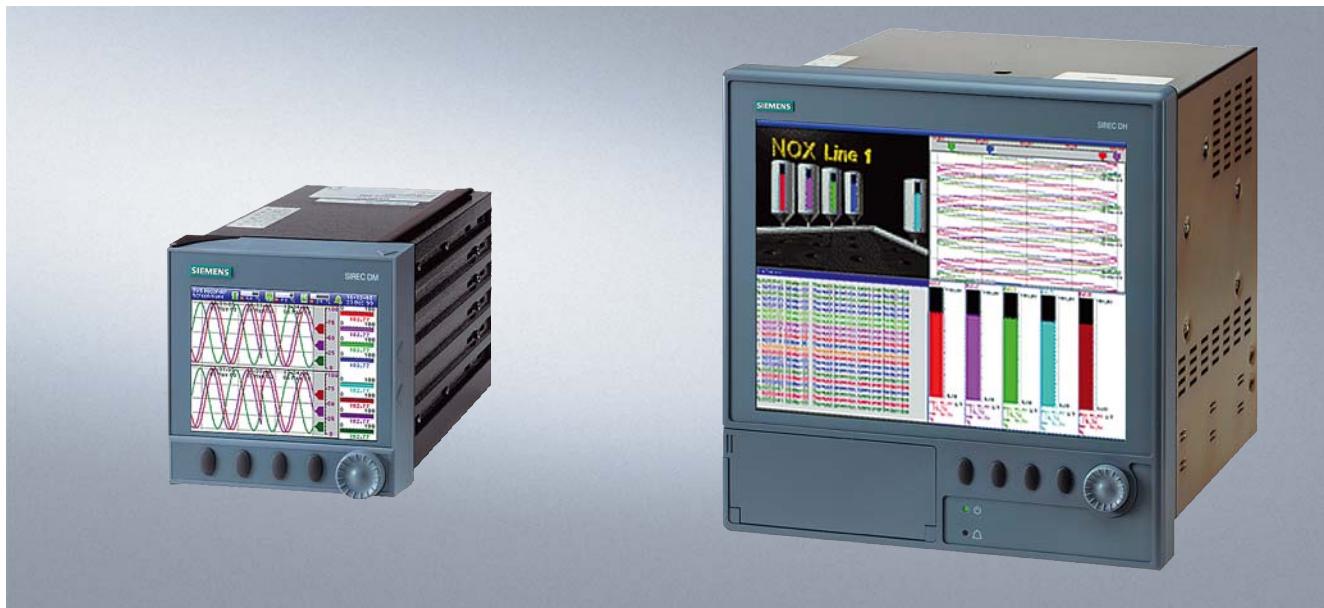

- Permits the recording of up to 16 analog inputs and 16 binary inputs (SIREC DM) or 32 analog inputs and 32 binary inputs (SIREC DH)
- Output on a color LC display (TFT)
 - 5.5" with SIREC DM
 - 12.1" with SIREC DH
- Storage of data on 1.44 Mbyte diskette or PCMCIA card (ATA flash type II)
- Ethernet interface as standard
- Data evaluation using the SIREC D-Viewer PC program (included in scope of delivery)
- Programming from the front panel or using the SIREC D-Manager PC program (option)
- Full network functionality (FTP, real-time Trendbus, Modbus) with the SIREC D Server PC program (option)
- Web server function

Application

The SIREC DM/DH recorders are used to record and display electrical variables.

The measured data in the main memory are available on the display for direct observation of the trend. The measured data on the replaceable data memory are evaluated on a PC.

- The input variables can be freely adjusted within wide ranges. The unit is therefore suitable for almost all process engineering sectors.
- The binary inputs and binary outputs permit control of the unit or also the output of signals.
- The recorder can be connected to a PC via Ethernet to permit central acquisition of the measured data.
- Comprehensive mathematical functions are optionally available.

Design

In housing for panel mounting; front dimensions 144 x 144 mm (SIREC DM) or 300 x 300 mm (SIREC DH).

The units are operated and set using an input panel (keys and spinwheel) on the front panel.

The drives for data storage (diskette drive and slot for PCMCIA card) are located behind the display (SIREC DM) or behind a cover (SIREC DH) and are readily accessible. The PCMCIA cards are not included in the scope of delivery.

The type and quantity of measuring inputs and switching outputs/inputs depends on the order. The number of terminals can therefore vary depending on the configuration.

The electric connections are made at the rear of the recorder:

- Power supply connection: appliance plug for 90 to 250 V AC version
- Power supply connection: screw terminals for 24 V DC version
- Process signal connections: plug-in screw terminals
- Ethernet TCP/IP interface connection: 8-pin RJ45 connector

The signal inputs "Fast sampling" for the current ranges have an internal shunt (switch).

External shunts are required for the option "Universal card with high EMC".

SIREC D display recorder

SIREC DM and SIREC DH

Function


The process variables are measured, and displayed as trend curves, bargraphs or digital displays in various combinations.

The internal memory (4 Mbyte with SIREC DM, 8 Mbyte with SIREC DH) is operated as a ring buffer. The oldest data in each case are overwritten by the newest data.


The following versions are possible for data recording on diskette or PCMCIA card:

- Selective data storage per channel. Individual selection of storage method and rate
- Optional data compression using fuzzy logging mode (selectable per channel)

Display of measured data

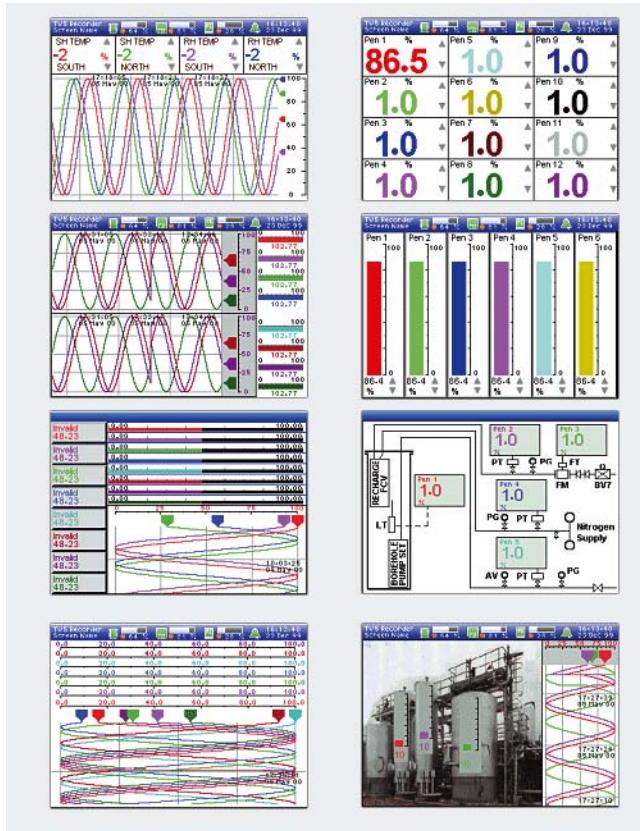

SIREC DM display modes

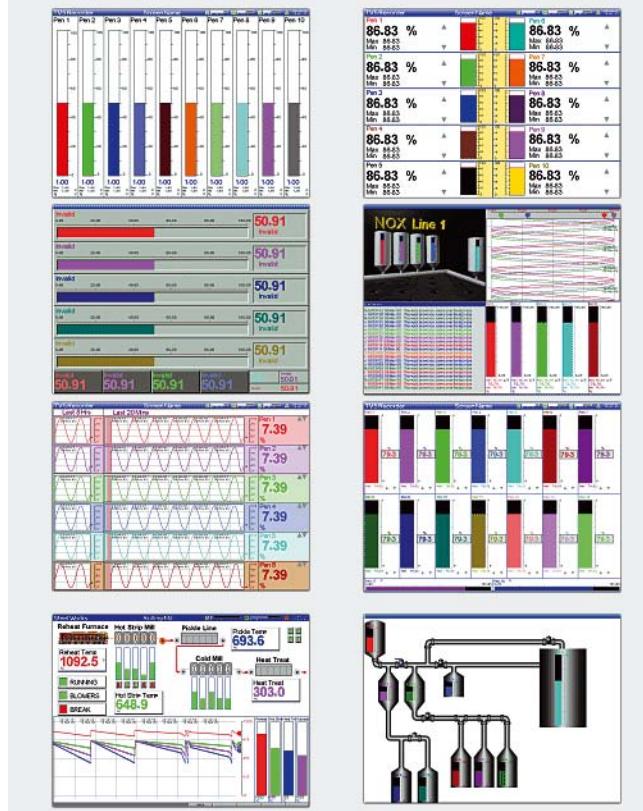

SIREC DH display modes

The display of the measured data can be freely adjusted within wide ranges, permitting:

- Analog trend display up to 12,000 mm/h
- Horizontal or vertical analog display
- Horizontal or vertical bargraph
- Detailed alarm and event reports
- Numerical display of values
- Event marking with I&C number, time and date
- Status line with date, time, occupation of RAM and diskette in percent
- Customized display and plant displays (SIREC DH)

Further important features

- Simple and fast configuration on the device or using software
- Operating menu in German, English, French, Italian, Spanish, Portuguese, Polish, Hungarian, Slovakian, Czech, Romanian, Turkish
- User-defined access coding with password protection. There are four access levels; up to 10 different passwords are possible.
- Enhanced security system ESS; with this option, the two SIREC DM/DH recorders comply with the requirements of FDA 21CFR Part 11
- Real-time clock with calendar function (with lithium backup battery, service life 10 years)

SIREC DM and SIREC DH

Technical specifications

Inputs	
Quantity	8, 12 or 16 input channels
• SIREC DM	24 or 32 input channels
• SIREC DH	
Sampling rates	
• Fast sampling card	200 ms (5 Hz)
- mA, mV	500 ms (2 Hz)
- Thermocouples/PT100	
• Universal card	500 ms (2 Hz)
- mA, mV, thermocouples/PT100	
Measured variables and measuring range limits	
Transmitter power supply	18 ... 24 V; 1 A
• SIREC DM	18 ... 24 V; 0.2 A
• SIREC DH	
Electrical isolation	100 V DC between the channels, 300 V DC between channels and ground
Input variables	
• DC voltage	± 1 V, ± 10 V
• Direct current	± 100 mV, ± 200 mV
- Resolution	± 10 mA, ± 20 mA
Effects of ambient temperature	16 bits A/D converter (0.0015%)
• Voltage input	0.005%/°C
• Current input	0.02%/°C
Input resistance, voltage inputs	> 1 MΩ
Current loop resistance	
• Fast sampling card	Internal, approx. 10 Ω ± 5%
• Universal card	With external 250 Ω shunt
Fast sampling card	
Thermocouples	
• C (W5)	Temperature range 0 ... 2300 °C
• E	-200 ... 0 °C 0 ... 1000 °C
• J	-200 ... 0 °C 0 ... 1190 °C
• K	-200 ... 0 °C 0 ... 1000 °C 1000 ... 1350 °C
• L	-200 ... +900 °C
• N (Nicrosil Nisil)	-200 ... 0 °C 0 ... 1300 °C
• T	-200 ... 0 °C 0 ... 400 °C
• W	1000 ... 2300 °C
• Nickel/cobalt	-50 ... +1300 °C
• Chromel/Copel	-50 ... +600 °C
Resistance thermometers	
• Pt100, 100 Ω	Temperature range -200 ... +650 °C
• Pt200, 200 Ω	-200 ... +180 °C
• Nickel 100 Ω	-60 ... +180 °C
• Nickel 120 Ω	-80 ... +240 °C

Universal card

Thermocouples	Temperature range
• B	0 ... 260 °C 260 ... 538 °C 538 ... 1820 °C
• C (W5)	0 ... 316 °C 316 ... 1982 °C 1982 ... 2300 °C
• E	-200 ... -130 °C -130 ... +1000 °C
• J	-18 ... +871 °C
• K	-18 ... +1316 °C
• L	-200 ... +900 °C
• N (Nicrosil Nisil)	-18 ... 1300 °C
• R	-18 ... +260 °C 260 ... 1704 °C
• S	-18 ... +260 °C 260 ... 1704 °C
• T	-184 ... +371 °C
• W_W ₂₆	1000 ... 2300 °C
• Nickel/cobalt	-50 ... +1360 °C
• Chromel/Copel	-50 ... +600 °C
Resistance thermometers	Temperature range
• Pt100, 100 Ω	-184 ... +649 °C
• Pt200, 200 Ω	-184 ... +649 °C
• Nickel 100 Ω	-60 ... +180 °C
• Nickel 120 Ω	-80 ... +240 °C
• Cu10	-20 ... +250 °C
• Cu53	0 ... 150 °C
Source resistance	
• Thermocouple	Approx. 0.5 °C/100 kΩ (1 kΩ max.)
• Resistance thermometer	Approx. 0.1 °C/Ω (40 Ω max.)
Cold junction compensation	
• Accuracy	Internal auto, external 0 °C
• Influence of cold junction compensation	± 1 °C 0.03 °C/°C
Integration time	50/60 Hz for suppression of system hum
Attenuation	Adjustable to an interval of 1 s to 15 s to generate the mean value of an incoming signal
Electrical isolation	
• Fast sampling card	100 V DC between channels and between channels and ground
• Universal card	400 V DC between channels and between channels and ground
Linear scaling	-999999 to +999999 with a scaling factor from 1 to 9999; automatic selection of decimal point; freely-definable technical dimensions (5 characters)
Logarithmic scaling	1 to 9 decades
Square-root extraction	For all input modes ± 1.000.000
• Scaling limits	User-adjustable
• Decimal places	Freely-definable, up to 12 characters
Display	Industry-type LCD (TFT)
Size	5.5" (14 cm) diagonal, color 12.1" (30.7 cm) diagonal, color
• SIREC DM	
• SIREC DH	
Resolution	QVGA (320 x 240 pixels) SVGA (800 x 600 pixels)
• SIREC DM	
• SIREC DH	
Temperature dimensions	°C, °F or K (Kelvin)
Trend display	1 ... 12000 mm/hour

SIREC D display recorder

SIREC DM and SIREC DH

Conditions for use		Technical specifications of options	
<u>Installation conditions</u>			
Mounting	Vertical panel mounting, max. $\pm 15^\circ$ out of horizontal	Updating interval	200 ms for channels
<u>Ambient conditions</u>		Quantity	2 or 4 channels
Permissible ambient temperature		Type	4 ... 20 mA, 0 ... 20 mA, 0 ... 24 mA
• Operation	0 ... 50 °C	Resolution	< 0.0015% (16 bits D/A converter)
• Storage	-10 ... +60 °C	Accuracy	$\pm 0.25\%$
Warm-up time	At least 30 min	Isolation	300 V DC
Relative humidity	10 ... 90 % (no condensation)		
Vibration	5 ... 100 Hz, 10 ms		
Shock	1 g		
Magnetic field	450 AT/m (0 ... 60 Hz)		
Degree of protection			
• Housing (front)	IP40		
• Terminals	IP20		
Design		Alarm cards	
Weight		Updating interval	200 ms for all alarms
• SIREC DM	3 kg	Quantity	• 4 relay outputs
• SIREC DH	10 kg	Type	• 8 relay outputs / 8 digital inputs • 16 I/O connections
Housing material			• 4 or 8 relays - NO/NC 3A 240 V AC/DC (not for inductive loads, with internal RC element)
• SIREC DM	Extruded aluminium		• 16 I/O - 1A 24 V DC (not for inductive loads, with internal RC element)
• SIREC DH	Galvanized steel plate, passivated	Triggering of alarm	Freely-programmable internal alarm level or rate of change
Front frame material		Terminal configuration	• 4 or 8 relays, (NO-C-NC) • 16 inputs/outputs, SPDT (C-NO)
• SIREC DM	Injection-molded ABS		
• SIREC DH	Aluminium, with gray powder-coated polyester		
Dimensions (W x H x D) in mm	See also dimension drawings		
• SIREC DM	144 x 144 x 285		
• SIREC DH	300 x 300 x 285		
	Recommendation: provide additional 30 mm for mains cable and signal plug.		
Mounting	Flush mounting in vertical panels; panel thickness: 2 ... 100 mm		
Power supply		Interfaces, media, protocols	
Supply voltage	90 ... 264 V AC 24 V DC (9 ... 36 V)	Interfaces	Ethernet and/or RS232, RS485
Power consumption		Protocols	• Own protocol (Trendbus) • Modbus • FTP Internet protocol
• SIREC DM	50 VA	Transmission media	• RS485 (2-wire or 4-wire system, electrically isolated) • Ethernet • RS232
• SIREC DH	50 VA	Modbus	RTU slave
Line frequency	47 ... 64 Hz		Reading and writing of data
			4-wire system (for RS485)
Safety and EMC standards		Mathematical functions (option)	
Safety standard	Corresponds to EN 61,010-1 (2001)	Addition	SIN
Noise immunity	Corresponds to EN 61,326-1 (1997)	Subtraction	COS
EC declaration of conformity	No. 3540.000 CE marking: 07/03 Compliance with following directives: 89/336/EEC, 73/23/EEC	Multiplication	TAN
		Division	Conversion from °F into °C
		Square	Conversion from °C into °F
		Square root	Running mean value
		Modulo	Lag
		Log	Index: analog signal
		LN (Napierian logarithm)	Index: digital I/O
		Minimum	Index: relay output
		Maximum	Evaluation
		Rounding-off	Exponent
		Reciprocal value	Lower limit
		Absolute value	Upper limit
		Total	Cold junction compensation
		Above	Alarm counter
		Below	Digital counter
		Within	Event counter
		Outside	User-defined counters

SIREC D display recorder

SIREC DM and SIREC DH


Selection and Ordering Data	Order No.	Selection and Ordering Data	Order No.
SIREC DM display recorder A) Front dimensions: 144 mm x 144 mm, for all applications, data memory: 1.44 MB diskette drive with slot for PC card	7ND4 420- 6 - ████	SIREC DH display recorder A) Front dimensions: 300 mm x 300 mm, for all applications, data memory: 1.44 MB diskette drive with slot for PC card	7ND4 460- 6 - ████
Power supply • 50 or 60 Hz, 90 ... 240 V AC • 24 V DC	► 1 4	Power supply • 50 or 60 Hz, 90 ... 240 V AC • 24 V DC	► 1 4
Signal inputs		Signal inputs	
• Fast sampling card 200 ms for mA, V, mV, 500 ms for TC/RTD/R (20 ms also possible for 8 analog inputs and measured variables mA/V/mV) - 8 inputs, without analog outputs - 8 inputs, 2 analog outputs - 8 inputs, 4 analog outputs - 12 inputs, without analog outputs - 16 inputs, without analog outputs	► A B C D E	• Fast sampling card 200 ms for mA, V, mV, 500 ms for TC/RTD/R (20 ms also possible for 8 analog inputs and measured variables mA/V/mV) - 16 inputs, without analog outputs - 24 inputs, without analog outputs - 24 inputs, 4 analog outputs - 32 inputs, without analog outputs	► D G H K
• Universal card high EMC, universal inputs (mA, mV, V, TC, RTD), sampling interval 500 ms - 8 inputs, without analog outputs - 8 inputs, 2 analog outputs - 8 inputs, 4 analog outputs - 12 inputs, without analog outputs - 16 inputs, without analog outputs	► P Q R S T	• Universal card high EMC, universal inputs (mA, mV, V, TC, RTD), sampling interval 500 ms - 24 inputs, without analog outputs - 24 inputs, 4 analog outputs - 32 inputs, without analog outputs	► U V W
Switching outputs and inputs • None • 8 relays, of which 2 can be optionally configured as binary input (240 V) • 8 binary outputs and inputs (24 V relay / freely-configurable) • 16 binary outputs and inputs (24 V relay / freely-configurable)	► A C D E	Switching outputs and inputs • None • 8 relays, of which 2 can be optionally configured as binary input (240 V) • 8 binary outputs and inputs (24 V relay / freely-configurable) • 16 binary outputs and inputs (24 V relay / freely-configurable) • 8 relays (240 V) / 16 binary outputs and inputs (24 V relays / freely-configurable) • 32 binary outputs and inputs (24 V relay / freely-configurable)	► A C D E F G
Interface • Ethernet (real-time Trendbus, Web, FTP, e-mail, Modbus) • Ethernet / RS232 / RS485 (real-time Trendbus, Web, FTP, e-mail, RS232 barcode) • RS485 (Modbus)	► 1 2 4	Interface • Ethernet (real-time Trendbus, Web, FTP, e-mail, Modbus) • Ethernet / RS232 / RS485 (real-time Trendbus, Web, FTP, e-mail, RS232 barcode, Modbus) • RS485 (Modbus)	► 1 2 4
Transmitter power supply • None • 24 V max. 100 mA	► 1 2	Transmitter power supply • None • 24 V max. 1000 mA	► 1 2
Firmware options • None • Mathematical functions and 8 additional recording channels • Event marking • Mathematics + summation + 8 additional recording channels • Mathematics + summation + 8 additional recording channels + event marking • Mathematics + summation + 16 additional recording channels + event marking	► A B D E H K	Firmware options • None • Mathematical functions + summation + event recording + 32 additional recording channels	► A H
Device version • Normal version with 4 MB RAM • Earthquake-proof version with 4 MB RAM • Normal version with 8 MB RAM (required with "Customized display") • Earthquake-proof version with 8 MB RAM (required with "Customized display") • ESS (FDA directive 21 CFR Part 11), with 8 MB RAM	► A B D E F	Device version • Normal version • Earthquake-proof version • ESS (FDA directive 21 CFR Part 11)	► A B C
Documentation • Manual in German • Manual in English	► 1 2	Documentation • Manual in German • Manual in English	► 1 2
► Available ex stock			
A) Subject to export regulations AL:N, ECCN: EAR99			
Scope of delivery: Recorder, CD-ROM with manual in German, English and French, SIREC D software (SIREC D-Viewer), memory card drive. Note: PC card is not included in the scope of delivery			

SIREC D display recorder


SIREC DM and SIREC DH

Accessories	Order No.	Options
Firmware options for SIREC DM Code No. of recorder required		
Mathematical functions and 8 additional recording channels	7ND4 800-8AC	
Summation	7ND4 800-8BC	
Event marking	7ND4 800-8CC	
Mathematics + summation + 8 additional recording channels	7ND4 800-8DC	
Mathematics + summation + event marking + 8 additional recording channels	7ND4 800-8GC	
ESS (FDA directive 21 CFR Part 11)	7ND4 800-8HC	
Firmware options for SIREC DH Code No. of recorder required		
Mathematical functions and 8 additional recording channels	7ND4 800-8AB	
Summation	7ND4 800-8BB	
Event marking	7ND4 800-8CB	
Mathematics + summation + event marking + 32 additional recording channels	7ND4 800-8GB	
ESS (FDA directive 21 CFR Part 11)	7ND4 800-8HB	
Options / enabling of SIREC D software Code No. of software required		
Enabling of SIREC D-Manager	7ND4 800-8BA	
Enabling of SIREC D-Server	7ND4 800-8CA	
Enabling of SIREC D-Designer	7ND4 800-8DA	
Upgrading of SIREC D-Manager to SIREC D-Server	7ND4 800-8EA	
Software Only for subsequent orders; software is included in delivery of recorder		
SIREC D software Evaluation software for SIREC DS/DM/DH (on CD) incl. enabling for SIREC D-Viewer and manual for the software on CD in German, English, French	7ND4 800-8AA	
Documentation Included on CD-ROM in scope of delivery		
SIREC DM and SIREC DH recorder manual		
• German (can also be downloaded from Internet)	A5E00117344	
• English (can also be downloaded from Internet)	A5E00117345	
• French (can only be downloaded from Internet)		


Dimensional drawings

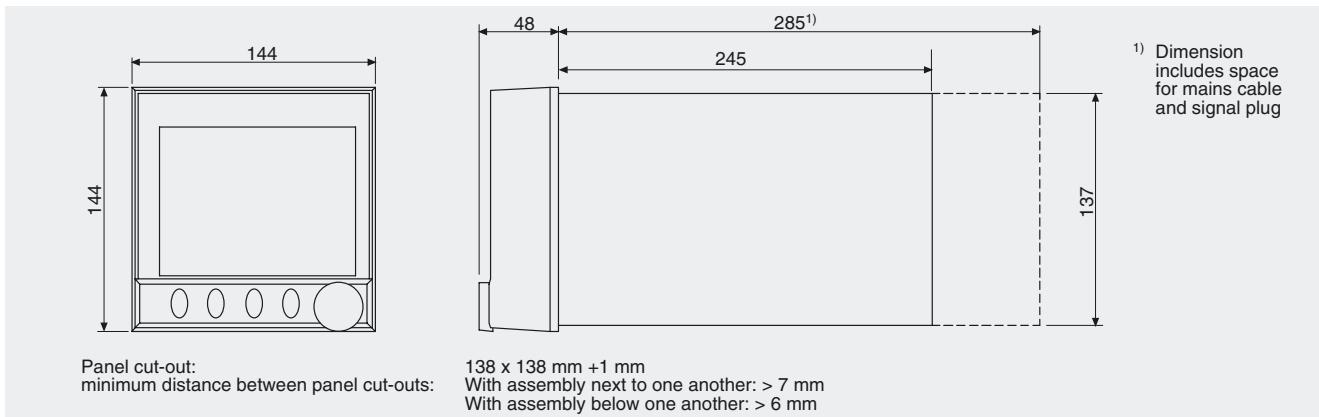

SIREC DM, dimensions

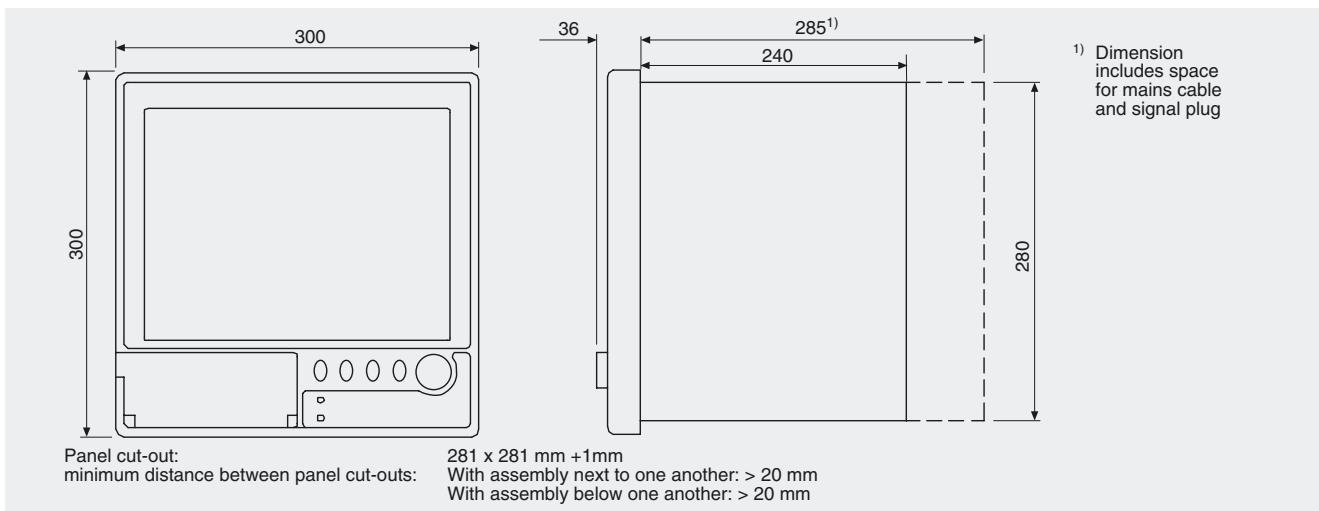

SIREC DH, dimensions

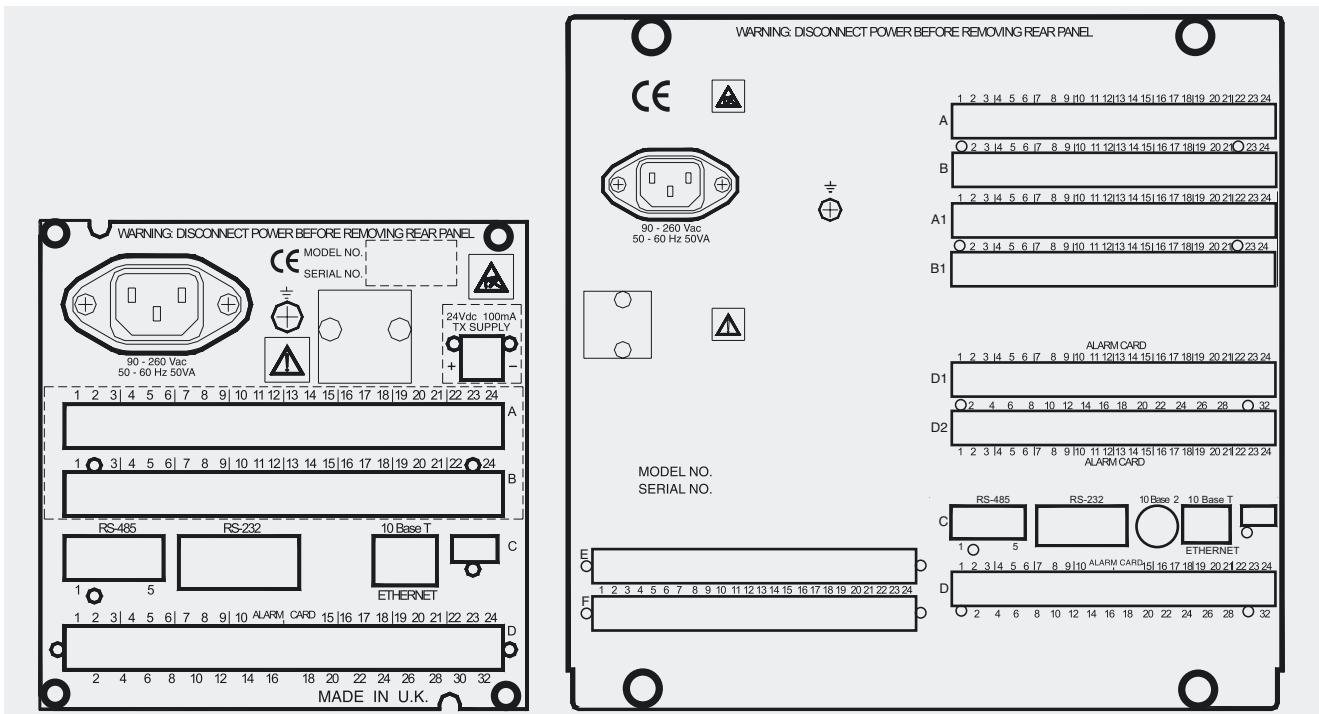

AC rear of SIREC DM (left) and SIREC DH (right)