


Milltronics MUS belt scale is a modular medium-duty belt scale for process indication. With no cross bridge, this versatile unit will fit most conveyor widths and standard idlers, and product build-up is reduced.

The modular construction and easy assembly of the MUS ensure quick delivery to meet even the tightest of schedules. Where scales are moved from conveyor to conveyor, the MUS also provides unmatched flexibility.

Operating with one of Siemens Milltronics' microprocessor-based integrators, the MUS provides indication of flow rate, total weight, belt load, and speed of bulk solids materials on a belt conveyor. A Siemens Milltronics speed sensor monitors conveyor belt speed for input to the integrator.

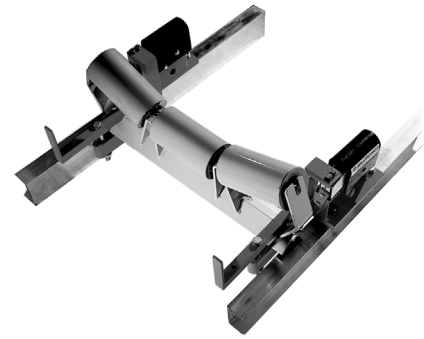

Product Features

- Unique modular design
- Simple installation
- Low cost
- Easy retrofit

Technical Specifications

Typical Application

- Monitor fractionated stone on secondary surge conveyors
- track daily production totals

Accuracy

- ± 0.5 to 1% of totalization over 3 to 1 operating range, application dependent

Belt Width

- standard duty up to 1000 mm (CEMA width up to 42")
- heavy duty 1200 mm and up (CEMA width 48" and up) although can be applied to narrower conveyors
- refer to the outline dimension section

Belt Speed

- up to 3 m/s (600 fpm)

Capacity

- up to 5000 t/h at maximum belt speed

Conveyor Incline

- $\pm 20^\circ$ from horizontal, fixed incline
- up to $\pm 30^\circ$ with reduced accuracy

Idler Profile

- flat to 35°
- up to 45° with reduced accuracy

Idler Diameter

- 50 to 180 mm (2 to 7")

Idler Spacing

- 0.6 to 1.5 m (2.0 to 5.0 ft)

Load Cell

- construction: aluminum
 - excitation: 10 Vdc nominal, 15 Vdc maximum
 - output: 2 mV/V excitation at rated load cell capacity
 - non-linearity: 0.02% of rated output
 - hysteresis: 0.02% of rated output
 - non-repeatability: 0.01% of rated output
 - capacity:
 - standard duty ranges: 20, 30, 50, 75, 100 kg
 - heavy duty ranges: 50, 100, 150, 200, 500 kg
 - overload: safe 150% of rated capacity, ultimate 300% of rated capacity
 - temperature:
 - -40 to 65°C (-40 to 150°F) operating range
 - -10 to 40°C (15 to 105°F) compensated
- Dimensions vary for standard and heavy duty versions

Hazardous Locations

- with the use of approved intrinsically safe barrier strips

Weight

- standard duty up to 20 kg (44 lbs.), 10 kg (22 lbs.) per side
- heavy duty up to 30 kg (64 lbs.), 15 kg (32 lbs.) per side

Interconnecting Wiring (to integrator)


- < 150 m (500 ft) 0.75 mm^2 (18 AWG) 6 conductor shielded cable
- > 150 m (500 ft) to 300m (1000 ft) 0.75 to 0.34 mm^2 (18 to 22 AWG) 8 conductor shielded cable

Approvals

- CE


Dimensions

Standard Duty

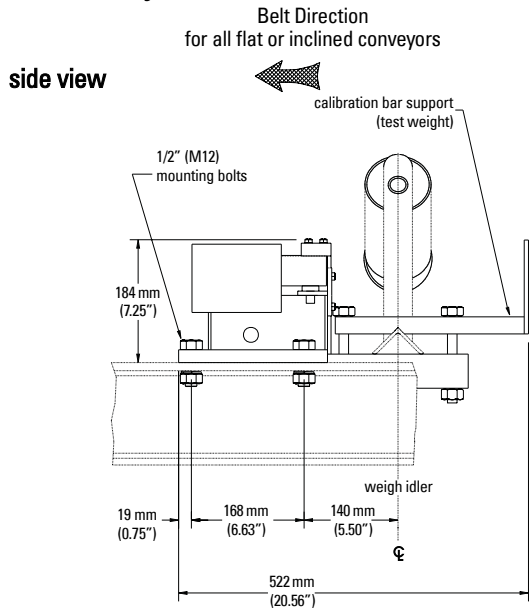


Notes:

(2) approach and (2) retreat idlers should be aligned with the weigh idler to within 0.8 mm (+1/32") to 0 mm (0").

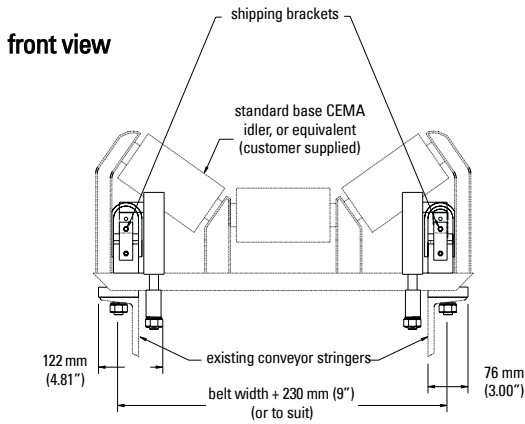


Heavy Duty

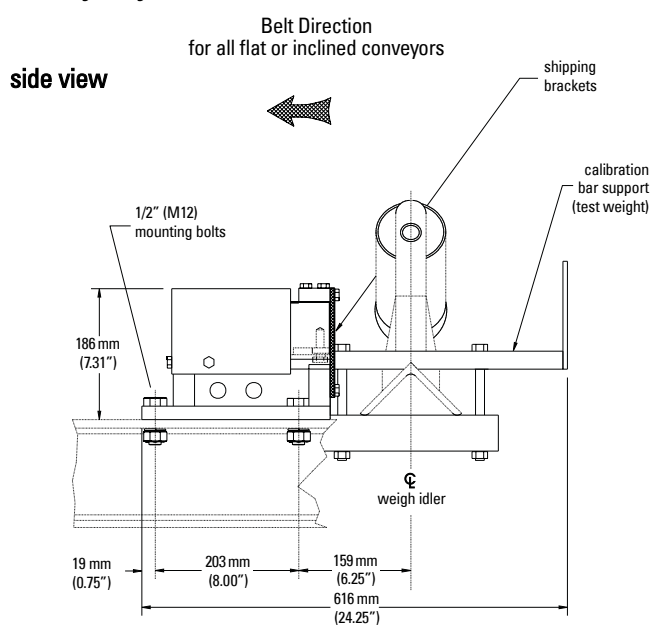

Notes:

(2) approach and (2) retreat idlers should be aligned with the weigh idler to within 0.8 mm (+1/32") to 0 mm (0").

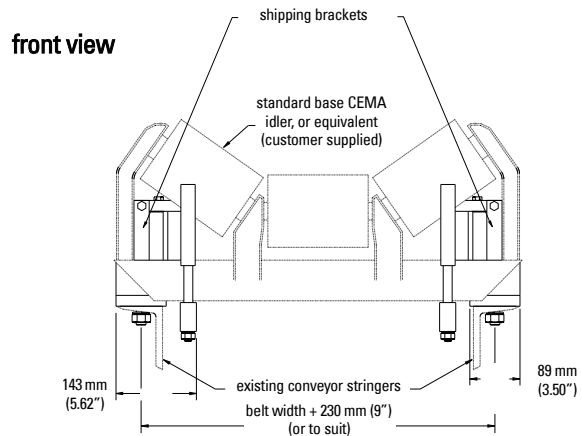

Wiring

